

## City of Gilroy

Public Works Department  
7351 Rosanna Street, Gilroy, California 95020  
T (408) 846-0451 F (408) 846-0429  
www.cityofgilroy.org

### FY 20 Spalling Concrete Repair 20-PW-255

TO: Whom it may concern  
FROM: Eric Argamaso, Engineer I

DATE: 12/04/2019

All prospective parties are hereby notified that modifications and/or changes are to be made to the original Bid Documents for this project, as entitled above.

#### **Addendum No. 1**

Please see questions received regarding this project with answers below:


1. When are you anticipating this project to start?
  - a. **This project is anticipated to start April 2020. This date is tentative and subject to change.**
  
2. Page 201 says to restripe in kind and it also mentions painting with spray equipment. It looks like the existing striping is thermoplastic. Will we be required to do touch up with thermo? Will just the removed section need to be replaced or will the whole bar / legend have to be replaced?
  - a. **All striping damaged shall be replaced in-kind. If the current striping is thermoplastic, the replacement shall also be in thermoplastic. Entire bars, legends, and stripings shall be replaced if they are partially damaged.**
  
3. In regards to the asphalt plug, page 199 says it is to be 3' wide, page 200 says 1' wide and the city standard shows 2' minimum. What section are we to include?
  - a. **Asphalt plugs shall be 1' minimum**
  
4. Specifications say that the contractor is to provide "*all quality control testing for concrete, water and soils shall be at the expense of the contractor*". I just wanted to confirm that this is testing for mix designs and submittals.
  - a. **The contractor shall be responsible for the testing of, but not limited to, mix design, submittals, and compaction of soils. The City is only responsible for Quality Assurance per the adopted QAP.**

5. Specification pages 200-203 reference root barriers. There is no specification as to when they will be required. Depth, type, quantity, etc.
  - a. **Root barrier shall be installed per the attached Revised City Standard Plan Drawing No. LS-6R. Linear root barrier shall be used in all situations where the hardscape is 6 feet or closer to the tree trunk. Root barrier shall be a minimum 24" deep. See Attachment on next page.**
  
6. Bid item #4a is to remove the existing curb ramp and replace with "sidewalk". Are we to remove the curb and gutter as well? There is no other bid item for curb and gutter. Do the other sidewalk and driveway items include replacement of curb and gutter?
  - a. **Refer to Section 01025 – Measurement and Payment, Section 2.0.C.4 – Bid Description for Portland Cement Curb Ramp Remove and Replace with Sidewalk.**

Best regards,




Eric Argamaso  
Engineer I  
City of Gilroy  
Public Works Department

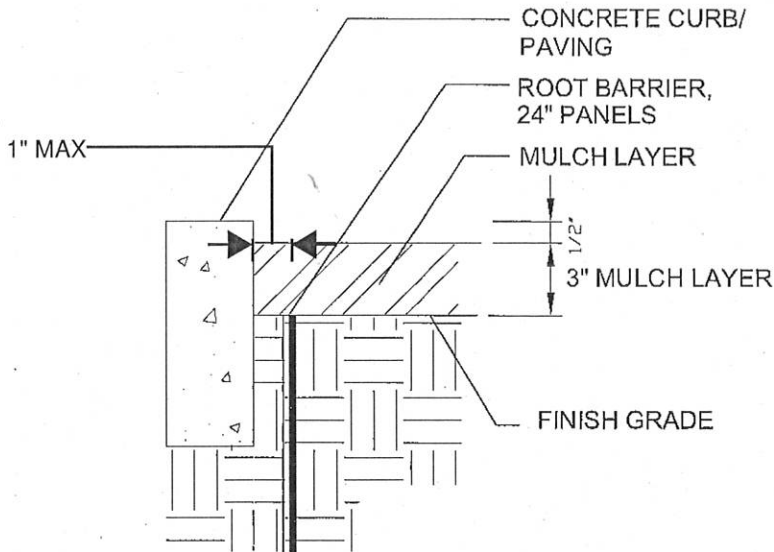

LINEAR ROOT BARRIER SECTION

NOTE:

1. LINEAR ROOT BARRIER TO BE USED IN ALL SITUATIONS WHERE HARDSCAPE IS 6' OR CLOSER TO TRUNK OF TREE

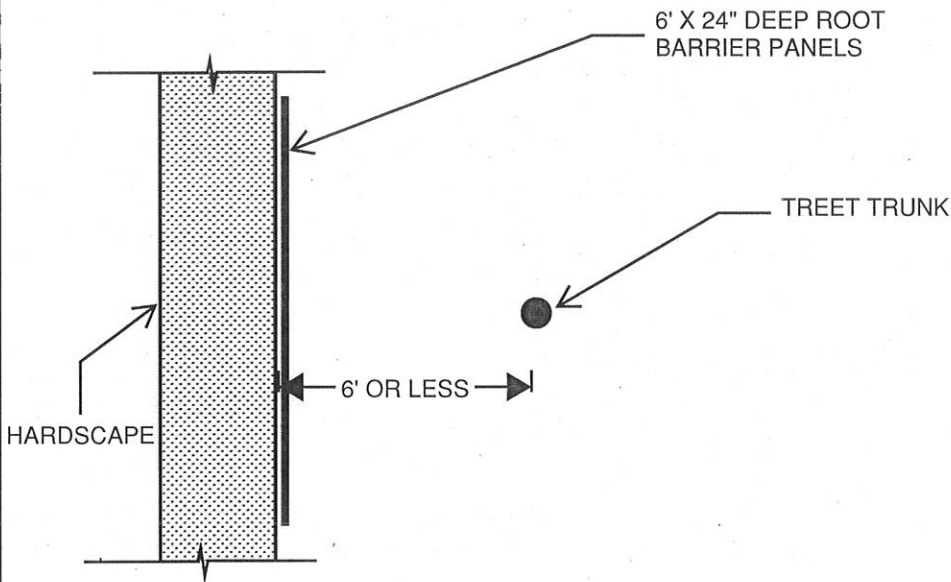

CIRCULAR ROOT BARRIER - PLAN VIEW

# ROOT BARRIER

DRAWN BY: CSG	SCALE:
CHECKED BY:	N.T.S.
LAST REVISED: 11-18-2019	

SECTION:  
**LANDSCAPING**



*[Signature]*

Engineer

11-18-2019

Date

DRAWING NO.: **LS-6R**