

Preventing Pollution: It's Up to Us

In South Santa Clara County, storm drains transport water directly to local creeks and Monterey Bay without treatment. Stormwater pollution is a serious problem for wildlife dependent on our waterways and for the people who live near polluted streams or baylands. Some common sources of this pollution include spilled oil, fuel, and fluids from vehicles and heavy equipment; construction debris; sediment created by erosion, landscaping runoff containing pesticides or weed killers; and materials such as used motor oil, antifreeze, and paint products that people pour or spill into a street or storm drain.

The Cities of Gilroy and Morgan Hill have joined together with Santa Clara County and the Santa Clara Valley Water District to educate local residents and businesses to prevent stormwater pollution. Join us, by following the practices described in this pamphlet.

Doing the Job Right

General Business Practices

- Schedule excavation and grading work during dry weather.
- Prevent sediment from migrating offsite and protect storm drain inlets, drainage courses, and streams, with appropriate BMPs (i.e., gravel rolls, silt fences, temporary swales, etc).
- Properly monitor and maintain all erosion and sediment controls.
- Follow the State's General Construction Activity Stormwater Permit requirements regarding uncontaminated ground water if your construction site disturbs one (1) acre or more of soil (http://www.swrcb.ca.gov/water_issues/programs/stormwater/construction.shtml).

Storm Drain Pollution from Dewatering

Contaminated groundwater is a common problem in Santa Clara County. Depending on soil types and site history, groundwater pumped from construction sites may be contaminated with toxics (such as oil or solvents) or laden with sediments. Any of these pollutants can harm wildlife in creeks or the Monterey Bay, or interfere with wastewater treatment plant operation.

Discharging sediment-laden water from a dewatering site into any water of the state without treatment is prohibited.

Dewatering Operations


Discharges of groundwater or captured runoff from dewatering operations must be properly managed and disposed. When possible send dewatering discharge to landscaped area or sanitary sewer. If discharging to the sanitary sewer call your local wastewater treatment plant. Divert run-on water from offsite away from all disturbed areas.

1. Check for Toxic Pollutants

- Check for odors, discoloration, or an oily sheen on groundwater.
- Call your local wastewater treatment agency and ask whether the groundwater must be tested if discharging to sanitary sewer.
- If contamination is suspected, have the water tested by a certified laboratory for likely pollutants.
- Depending on the test results, you may be allowed to discharge pumped groundwater (if no sediments present) to the sanitary sewer system. OR, you may be required to collect and haul pumped groundwater offsite for treatment and disposal at an appropriate treatment facility.

2. Check for Sediment Levels

- If the water is clear, the pumping time is less than 24 hours, and the flow rate is less than 20 gallons per minute, you may pump water to the street or storm drain.
- If the pumping time is more than 24 hours and the flow rate greater than 20 gpm, call your local wastewater treatment plant for guidance.
- If the water is not clear, solids must be filtered or settled out (e.g. by pumping to a settling tank) prior to discharge. Options for filtering include:
 - Pumping through a perforated pipe sunk part way into a small pit filled with gravel;
 - Pumping from a bucket placed below water level using a submersible pump;
 - Pumping through a filtering device such as a swimming pool filter or filter fabric wrapped around the end of the suction pipe.
- When discharging to a storm drain, protect the inlet using a barrier of burlap bags filled with drain rock, or cover inlet with filter fabric anchored under the grate. OR pump water through a grassy swale prior to discharge. Refer to the CASQA *Construction BMP Online Handbook* (www.casqa.org/resources/bmp-handbooks) for dewatering control measures.

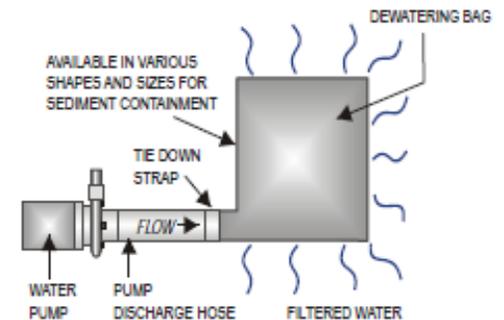

Picture Source: CASQA Stormwater BMP Handbook Portal NS-2 Fact Sheet

Small Business Hazardous Waste Disposal Program

Businesses that generate less than 27 gallons or 220 pounds of hazardous waste per month are eligible to use Santa Clara County's Conditionally Exempt Small Quantity Generator Program. Call (800) 207-8222 for a quote, more information or guidance on disposal.

This brochure is one in a series of pamphlets describing storm drain pollution prevention measures for specific types of construction industry activities. Other pamphlets include:

General Construction and Site Supervision

Landscaping and Gardening

Fresh Concrete and Mortar Application

Painting and Application of Solvents and Adhesives

Roadwork and Paving

Earth-Moving and Heavy Equipment Operation

Home Repair and Remodeling

For additional brochures, visit the City of Gilroy website at: <http://www.cityofgilroy.org/261/Storm-Water-Management>, or call City Hall at (408)-846-0400 for more information.

The City of Gilroy would like to thank SCVURPPP for providing information contained in this brochure.



Last Updated: May 2016

Spill Response Agencies:

1. City of Gilroy, call (408) 846-0350.
2. City of Morgan Hill, call (408) 776-7333.
3. Unincorporated Santa Clara County, call (408) 918-3400
4. In other cities, find the contact number at www.scvurppp-w2k.com/report_spill.shtml or **DIAL 9-1-1**
5. State Office of Emergency Services Warning Center (24 hours). **1-800-852-7550**
6. Santa Clara County's Illegal Dumping/ Discharge Hotline. (408) 918-3400

Local Pollution Control Agencies

County of Santa Clara Integrated Waste Management Program. (408) 282-3180

County of Santa Clara District Attorney Environmental Crimes Hotline. . . . (408) 299-TIPS

Santa Clara County Recycling Hotline. 1-800-533-8414

Santa Clara Valley Water District. (408) 265-2600

Santa Clara Valley Water District Pollution Hotline. 1-888-510-5151

South County Regional Wastewater Facility Serving Gilroy and Morgan Hill..... (408) 846-0202

Dewatering Activities

Best Management Practices (BMPs) for the Construction Industry



Picture Source: CASQA Stormwater BMP Handbook Portal NS-2 Fact Sheet

Who should use this brochure?

- Site supervisors
- General contractors
- Home builders
- Developers